

**PRODUCT SPECIFICATION**

Specification No	BPAP--01650	Version No.	V3
Date/Time Spec.Complete	24-MAY-2023 1:00 pm	Product Category	
Created By		Sales Rep	
Category Manager		Product in Food Contact	Yes

**CRITICAL CRITERIA**

Sap Code	30327	Is Barcode Required?	
BRC Packaging Accreditation	Yes		
FSC Certified Raw Material	No	FSC Certified Finished Product	No
PEFC Certified Raw Material	No	PEFC Certified Finished Product	No
Product Description	Plain Foil Lined Paper Bag	Product Style	Heat Sealed Base Satchel Bag
Handle Type and Dimensions (mm)	NO HANDLES	Handle Type and Dimensions Tolerance	No Handles
Open Width (mm)	228	Open Width Tolerance	±5mm
Closed Width (mm)	178	Closed Width Tolerance	±5mm
Length (mm)	305	Length Tolerance	±5mm
(Total) Side/Bottom Gusset (mm)	50	(Total) Side/Bottom Gusset Tolerance	±5mm
Film Type (+additives%)	N/A	Film Perforations	N/A
Film Colour	N/A		
Film Thickness (mu)	N/A	Film Thickness Tolerance	N/A
Paper Type	BLEACHED KRAFT FOIL LINED	Paper Colour	WHITE & SILVER
Paper Thickness (gsm)	70	Paper Thickness Tolerance	±3gsm
Printed?	No	Sides Printed	
Ink Colours		Ink Coverage (%)	
Ink Colours (Pantone Numbers)			
Inner Packaging Details	Laid Flat	Outer Packaging Details	450Pcs Per Shrinkwrap

**SECONDARY CRITERIA**

Wicket Details (mm)	0	Reinforcement	0
Window Details (mm)	0	Window Details Tolerance	N/A
Strung Details	0	Lamination	0
Turn Over Top (mm)	0	Turn Over Top Tolerance	N/A
Unit Weight - Individual Item (g)	10.57	Unit Weight - Individual Item Tolerance	±10%
Total Weight Excluding Outer Pack (kg)	4.76	Total Weight Excluding Outer Pack Tolerance	±10%
Total Weight Including Outer Pack (kg)	4.87	Total Weight Including Outer Pack Tolerance	±10%
Specification Comments			

**ADDITIONAL CRITERIA**

Customer Code Required	NO	Customer Code	
Outer Barcode and Format	05022458010603 - Int 2/5	Inner Barcode and Format	N/A
Individual Product Barcode and Format			
Perforations	N/A	Ultimate Lift (kg)	N/A
Jog Test (kg/min)	N/A	Jog Test Tolerance	N/A
Ink Adhesion	N/A		

<b>Applicable Regulations</b>	FOOD CONTACT REGULATIONS MATERIALS AND ARTICLES IN CONTACT WITH FOODSTUFF 1935/2004 & 10/2011/EC. PACKAGING REGULATIONS 94/62/EC. REACH REGULATIONS.	<b>Carton Labels/Markings</b>	See Enclosed Pack Label:
<b>Pallet Type</b>	GKN CHEP PALLET / 1000X1200mm	<b>Pallet Configuration</b>	No. Of Packs Per Layer: 9 No. Of Layers Per Pallet: 15 Total No. Packs Per Pallet: 135
<b>Additional Information</b>	Note: No product quantity information should be printed on Pack Label/Markings.	<b>Carton Depth (mm)</b>	
<b>Carton Width (mm)</b>		<b>Carton Length (mm)</b>	

<b>PLASTIC PACKAGING TAX</b>			
<b>Product Material</b>	N/A	<b>Product Classification</b>	1
<b>Product Net Weight(kg)</b>	0.000		
<b>Primary Packaging 1</b>	Virgin	<b>Primary Packaging 1 Classification</b>	2
<b>Primary Packaging 1 Net Weight (kg)</b>	0.020		
<b>Primary Packaging 2</b>	N/A	<b>Primary Packaging 2 Classification</b>	1
<b>Primary Packaging 2 Net Weight (kg)</b>	0.000	<b>Weight relevant for PPT (kg)</b>	0.020

<b>BARCODE / IMAGES / ARTWORK</b>
-----------------------------------

**The enclosed is for illustrative purposes only.**

**The original high quality artwork is available separately.**


**Pack label 2**

<b>PROJECT REF:</b> 132_Economy Bag Range_Don	<b>NUMBER OF PRINT COLOURS:</b> ONE(1)	<b>REVISION No</b>
<b>CLIENT:</b> EUROPACKAGING	<b>DESIGNER:</b> SM	<b>01</b>
<b>DIMENSIONS:</b> 100x75mm	<b>DATE:</b> 29.04.2015	
<b>SCALE:</b> 1:1	<b>APPROVED BY:</b> Ian Haywood 29.04.2015	


Euro Packaging UK Ltd, 20 Brickfield Road, Yardley, Birmingham, B25 8HE t: +44 (0) 121 706 6181 f: +44 (0) 121 693 2786 www.europackaging.co.uk

100mm

75mm

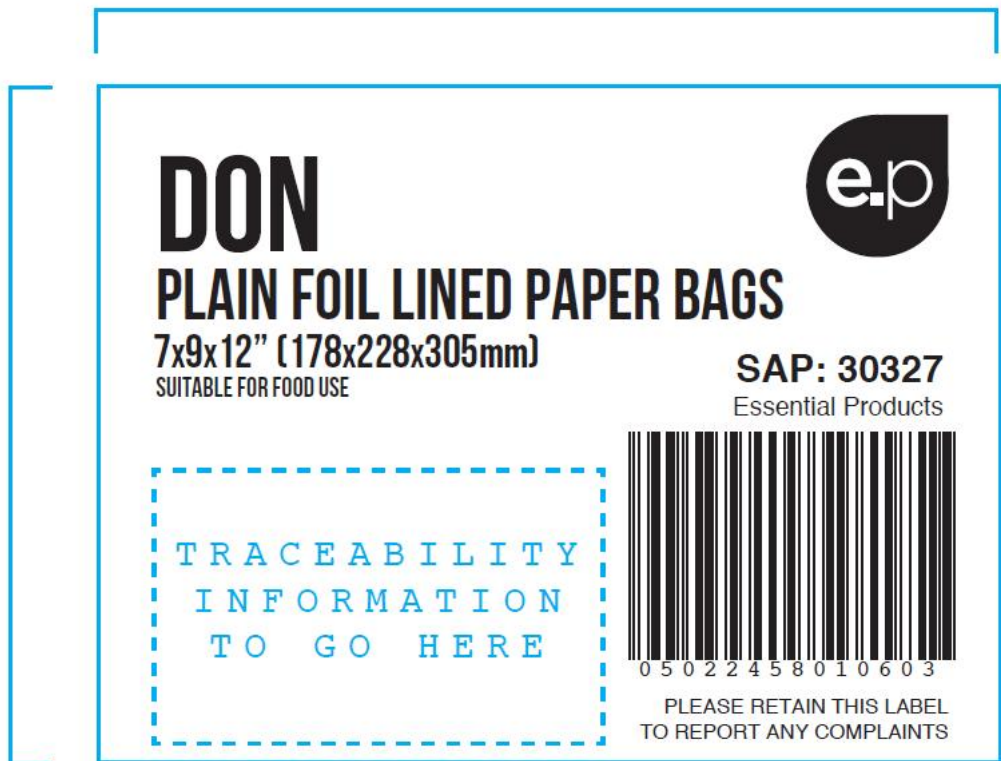

Pallet Configuration






Product Length	1160
Product Width	990
Product Height	1330
Load Ref.	1 I
Area Used	93.0%
Cube Used	91.7%
Per Layer	11
Layers	14
Case /Load	154

Set-up Buttons

Summary Report

Solution Report



**PLEASE NOTE**

This specification is a controlled copy when approved by relevant staff and dated. Subsequent changes in staff do not affect the validity of this specification.